


## Detail

Style Number	<b>5T384</b>	
Collection	<b>Auxiliary</b>	
Product Type	<b>Carpet Tile</b>	
Construction	<b>Standard</b>	<b>Data + Performance</b>
Type of Manufacture	<b>ISO 2424</b>	<b>tufted 1/12"   47.2 per 10cm</b>
Aspect	<b>ISO 2424</b>	<b>Level Loop</b>
Dye Method	<b>EN 994</b>	<b>100% Solution Dyed</b>
Dimensions	<b>EN 994</b>	<b>50 cm x 50 cm   20 tiles (5 m<sup>2</sup>) per box</b>
Primary Backing	<b>ISO 2424</b>	<b>Pet Non-Woven</b>
Secondary Backing	<b>ISO 2424</b>	<b>Taskworx@tile   Polymer Modified Bitumen</b>
Pile Fibre Composition	<b>ISO 2424</b>	<b>Aquafil Polyamide 6</b>
Total Thickness	<b>ISO 1765</b>	<b>5.1 mm</b>
Effective Pile Thickness	<b>ISO 1766</b>	<b>1.0 mm</b>
Total Mass	<b>ISO 8543</b>	<b>4248 g/m<sup>2</sup></b>
Nominal Total Pile Mass	<b>ISO 2424</b>	<b>450 g/m<sup>2</sup></b>
Effective Pile Mass	<b>ISO 8543</b>	<b>126 g/m<sup>2</sup></b>
Pile Density	<b>ISO 8543</b>	<b>0.121 g/cm<sup>3</sup></b>

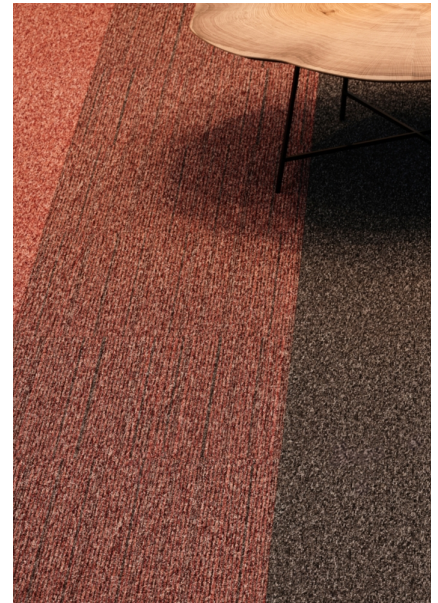

## Performance


Number of Tufts	<b>ISO 1763</b>	<b>184,000/m<sup>2</sup>   39 per 10 cm</b>
Electrostatic Propensity	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Use Classification	<b>EN 1307</b>	<b>33 commercial heavy</b>
Luxury Class	<b>EN 1307</b>	<b>LC1</b>
Dimensional Stability	<b>EN 986</b>	<b>≤ 0.2%</b>
Impact Sound Insulation	<b>ISO 10140</b>	<b>21dB</b>
Sound Absorption Classification	<b>ISO 354/11654</b>	<b>0.10 α<sub>w</sub></b>
Thermal Resistance m <sup>2</sup> K/W	<b>ISO 8302</b>	<b>0.046 m<sup>2</sup> K/W TOG 0.46</b>
Dry Slip Resistance	<b>ISO 13893</b>	<b>pass</b>
Colour Fastness to Light	<b>ISO 105-B02</b>	<b>&gt;6</b>
Flammability	<b>EN 13501-1</b>	<b>Bfl-S1 (adhered testing)</b>
Castor Chair	<b>EN 948</b>	<b>≥2.4 Continuous Use</b>

**10 Year Commercial Limited Warranty** subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

## Recommended Installation Method



Quarter Turn



Brick

## Coordinating Products

Carpet Tile: **Complement, Feature**



21dB 0.10 α<sub>w</sub>

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

**CE**  
07  
EN14041  
**DOP 0338/CPR/0517/0917/BT**  
Manufactured by: SHAW EUROPE LTD. BLACKADDIE  
ROAD INDUSTRIAL ESTATE, SANQUHAR, DG4 6DB, UK

**E1**  
HCHO

Bfl-s1

DS

Taskworx@Tile | Polymer Modified Bitumen Carpet Tile for  
use as an indoor floor covering as specified by the  
manufacturer  
Notified Body Number 0338

## Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Taskworx products are Cradle to Cradle Certified™ Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

## Attributes + Certifications

Cradle to Cradle Certified™

Environmental Product Declaration (EPD)

Environmental Guarantee\*

Country of Origin\*\*

**Bronze Level (Version 3.1)**

**3rd Party Certified in Accordance with ISO 14044, ISO 14025 & EN15804**

**Take Back Policy Offered For All Taskworx Products**

**United Kingdom**

## LEED Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with ISO 14044, ISO 14025 & EN15804**

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

**HPD (Version 2.1) or C2C Bronze Level (Version 3.1)**

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 2: Material Ingredient Optimization

**C2C Bronze Level (Version 3.1)**

## Additional Information

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)













Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.



## Light Reflectance Value

					
LRV 14.6 Smoke Spring 83326	LRV 13.2 Smoke Mint 83327	LRV 10.8 Pebble Lagoon 83419	LRV 10.7 Smoke Cadet 83440	LRV 10.2 Smoke Azure 83486	LRV 6.1 Smoke Black 83505
					
LRV 13.5 Pebble Ash 83535	LRV 16.0 Smoke Ice 83536	LRV 5.0 Pebble Flint 83549	LRV 13.8 Pebble Blush 83675	LRV 9.8 Pebble Coral 83866	LRV 9.2 Pebble Blossom 83870