

TECHNICAL INFORMATION

1684 MAINLINE


TECHNICAL SPECIFICATIONS ACCORDING TO EN 1307

| | | | |
|------------------------|------------------------------------|-----------------|-------------------------------------|
| constructie | <i>construction</i> | ISO 2424 | 1/8" 2 coloured fine striped bouclé |
| poolmateriaal | <i>yarn content</i> | ISO 2424 | 100% wool |
| rug | <i>backing</i> | ISO 2424 | SBR free Actionbac® |
| gebruiksklasse | <i>suitability</i> | EN 1307 | 23/32 general contract use |
| poolgewicht | <i>pile weight</i> | ISO 2424 | 1040 gr/m ² |
| totaal gewicht | <i>total weight</i> | ISO 8543 | 2125 gr/m ² |
| pooldikte | <i>pile height</i> | ISO 1766 | 3.2 mm |
| totaal dikte | <i>total thickness</i> | ISO 1765 | 6.4 mm |
| noppental | <i>tuft density</i> | ISO 1763 | 104,000 tufts/m ² |
| breedte | <i>width</i> | CEN/TS 14159 | ca. 4m / 5m |
| warmteoorlaatweerstand | <i>thermal resistance</i> | ISO 8302 | 0.13 m ² K/W |
| brandklasse | <i>flammability</i> | ISO 13501-1 | Bfl-s1 |
| contactgeluidsisolatie | <i>impact sound insulation</i> | ISO 140-8/717-2 | 25 dB |
| rapport | <i>pattern repeat</i> | CEN/TS 14159 | 6 mm (345: 13 mm and 355 : 134 mm) |
| structure | <i>Konstruktion</i> | ISO 2424 | 1/8" 2 coloured fine striped bouclé |
| composition | <i>Polmaterial</i> | ISO 2424 | 100% wool |
| dossier | <i>Beschichtung</i> | ISO 2424 | SBR free Actionbac® |
| classement d'usage | <i>Zusatzeignung</i> | EN 1307 | 23/32 general contract use |
| poids de velours | <i>Poleinsatzgewicht</i> | ISO 2424 | 1040 gr/m ² |
| poids total | <i>Gesamtgewicht</i> | ISO 8543 | 2125 gr/m ² |
| hauteur du velours | <i>Polschichtdicke</i> | ISO 1766 | 3.2 mm |
| épaisseur totale | <i>Gesamtdicke</i> | ISO 1765 | 6.4 mm |
| densité | <i>Noppenzahl</i> | ISO 1763 | 104,000 tufts/m ² |
| dimensions | <i>Breite</i> | CEN/TS 14159 | ca. 4m / 5m |
| résistance thermique | <i>Wärmedurchlasswiderstand</i> | ISO 8302 | 0.13 m ² K/W |
| comportement au feu | <i>Brandverhalten</i> | ISO 13501-1 | Bfl-s1 |
| isolation acoustique | <i>Trittschallverbesserungsmaß</i> | ISO 140-8/717-2 | 25 dB |
| raccord | <i>Rapport</i> | CEN/TS 14159 | 6 mm (345: 13 mm and 355 : 134 mm) |

COLOURS

| | | |
|-------------------|---------------------|----------------------|
| 122 St. Paul's | 229 Shepherd's Bush | 355 Liverpool Street |
| 132 Oxford Circus | 269 Bond Street | |
| 133 Notting Hill | 321 Gloucester Road | |
| 148 Holland Park | 339 Holborn | |
| 163 Marble Arch | 345 Chancery Lane | |

PRODIS RATING AND INFORMATION

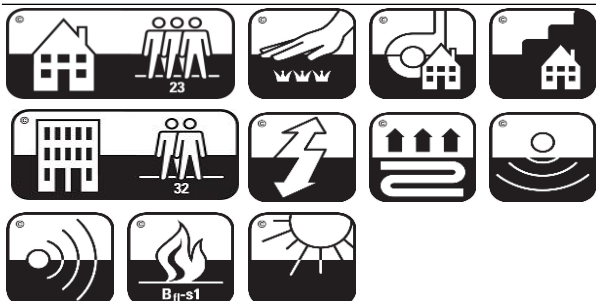

EN 1307



PRODIS: 80E917D9

DOP: 1025-114558



CONTACT INFORMATION

THE NETHERLANDS
(HEAD OFFICE)
NIJVERHEIDSTRAAT 39
NL - 8281 JD GENEMUIDEN
+31 (0)38 385 22 11
info@edelcarpets.com
www.edelcarpets.com

geproduceerd door / manufactured by

fabriqué par / hergestellt durch

edelcarpets®
since 1918

Alle technische specificaties zijn onderhevig aan productietoleranties. Voor alle voorwaarden en onderhoudsadvies verwijzen wij u graag naar onze website.

All specifications are subject to normal manufacturing tolerances. For all Terms & Conditions, care and maintenance, please visit our website.

Toutes les spécifications techniques sont sujet aux tolérances de fabrication. Merci de consulter notre website pour toutes informations et les conseils d'entretien.

Alle technische Daten unterliegen Produktionstoleranzen. Bedingungen und Pflegeempfehlungen finden Sie auf unserer Website.

v3