

## TECHNICAL INFORMATION

2428 VANITY


### TECHNICAL SPECIFICATIONS ACCORDING TO EN 1307

constructie	<i>construction</i>	ISO 2424	5/64" super soft saxony
poolmateriaal	<i>yarn content</i>	ISO 2424	100% PA 6.6.
rug	<i>backing</i>	ISO 2424	SBR free Actionbac®
gebruiksklasse	<i>suitability</i>	EN 1307	23 / 32 medium contract use
poolgewicht	<i>pile weight</i>	ISO 2424	1675 gr/m <sup>2</sup>
totaal gewicht	<i>total weight</i>	ISO 8543	2575 gr/m <sup>2</sup>
pooldikte	<i>pile height</i>	ISO 1766	10.0 mm
totaal dikte	<i>total thickness</i>	ISO 1765	11.0 mm
noppental	<i>tuft density</i>	ISO 1763	307.440 tufts/m <sup>2</sup>
breedte	<i>width</i>	CEN/TS 14159	ca. 4 m (* also available in 5m)
warmtedoorlaatweerstand	<i>thermal resistance</i>	ISO 8302	0.15 m <sup>2</sup> K/W
brandklasse	<i>flammability</i>	ISO 13501-1	Bfl-S1 fully glued
geluidsabsorptie	<i>sound absorption</i>	EN ISO/IEC 17025	0.20 aw
contactgeluidsisolatie	<i>impact sound insulation</i>	ISO 140-8/717-2	31 dB
structure	<i>Konstruktion</i>	ISO 2424	5/64" super soft saxony
composition	<i>Polmaterial</i>	ISO 2424	100% PA 6.6.
dossier	<i>Beschichtung</i>	ISO 2424	SBR free Actionbac®
classement d'usage	<i>Zusatzeignung</i>	EN 1307	23 / 32 medium contract use
poids de velours	<i>Poleinsatzgewicht</i>	ISO 2424	1675 gr/m <sup>2</sup>
poids total	<i>Gesamtgewicht</i>	ISO 8543	2575 gr/m <sup>2</sup>
hauteur du velours	<i>Polschichtdicke</i>	ISO 1766	10.0 mm
épaisseur totale	<i>Gesamtdicke</i>	ISO 1765	11.0 mm
densité	<i>Noppenzahl</i>	ISO 1763	307.440 tufts/m <sup>2</sup>
dimensions	<i>Breite</i>	CEN/TS 14159	ca. 4 m (* also available in 5m)
résistance thermique	<i>Wärmedurchlasswiderstand</i>	ISO 8302	0.15 m <sup>2</sup> K/W
comportement au feu	<i>Brandverhalten</i>	ISO 13501-1	Bfl-S1 fully glued
absorbtion acoustique	<i>Shallabsorptiongrad</i>	EN ISO/IEC 17025	0.20 aw
isolation acoustique	<i>Trittschallverbesserungsmaß</i>	ISO 140-8/717-2	31 dB

### COLOURS

102 Snow *	139 Silver *	173 Seal	225 Apricot
105 Powder	145 Copper	183 Aubergine	244 Bulrush
112 Pearl	146 Khaki	184 Loam	245 Grenadine
119 Salt *	151 Atlantic	189 Elephant *	271 Indigo
129 Ash *	155 Rose	193 Chocolate	284 Spruce
133 Taupe	159 Dust	199 Onyx	

### PRODIS RATING AND INFORMATION

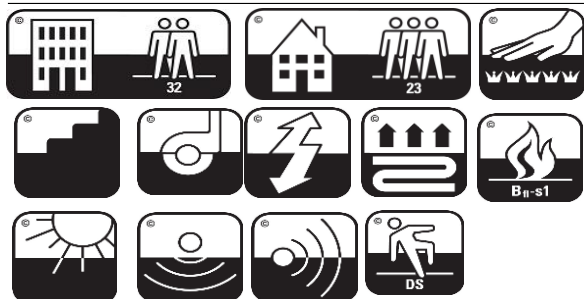

PRODIS: BA15918A  
DOP: 1025-122191

### CONTACT INFORMATION

THE NETHERLANDS  
(HEAD OFFICE)  
NIJVERHEIDSTRAAT 39  
NL - 8281 JD GENEMUIDEN  
+31 (0)38 385 22 11  
[INFO@EDEL CARPETS.NL](mailto:INFO@EDEL CARPETS.NL)  
[WWW.EDEL CARPETS.NL](http://WWW.EDEL CARPETS.NL)

geproduceerd door / manufactured by  
fabriqué par / hergestellt durch

**edel** carpets®  
since 1918

Alle technische specificaties zijn onderhevig aan productietoleranties. Voor alle voorwaarden en onderhoudsadvies verwijzen wij u graag naar onze website.

All specifications are subject to normal manufacturing tolerances. For all Terms & Conditions, care and maintenance, please visit our website.

Toutes les spécifications techniques sont sujet aux tolérances de fabrication. Merci de consulter notre website pour toutes informations et les conseils d'entretien.

Alle technische Daten unterliegen Produktionstoleranzen. Bedingungen und Pflegeempfehlungen finden Sie auf unserer Website.

V3