


# BLOQ

creative  
carpet tiles

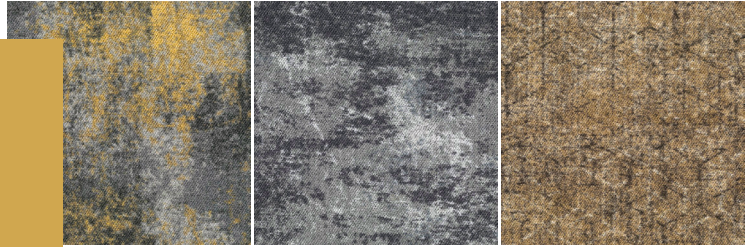

## THE TRINITY 'RELAX' ASSEMBLY, SENSITIVITY & UNITY

### SPECIFICATIONS





<b>TYPE OF MANUFACTURE</b>	Tufted Patterned Loop Pile 1/10"
	ISO 2424
<b>PILE FIBER COMPOSITION</b>	ECONYL®
	ISO 2424 100% Regenerated Nylon
<b>SECONDARY BACKING</b>	RELAX Cushion Backing
	ISO 2424 100% Recycled Content
<b>DIMENSION</b>	50 x 50 cm
	EN ISO 24342
<b>PILE WEIGHT</b>	650 g/m <sup>2</sup>
	ISO 8543
<b>SURFACE PILE WEIGHT</b>	350 g/m <sup>2</sup>
	ISO 8543
<b>TOTAL WEIGHT</b>	4 000 g/m <sup>2</sup>
	ISO 8543
<b>TOTAL THICKNESS</b>	9.5 mm
	ISO 1765
<b>PILE HEIGHT</b>	2.3 mm
	ISO 1766
<b>PILE DENSITY</b>	0.152 g/m <sup>3</sup>
	ISO 8543
<b>NUMBER OF TUFTS</b>	208 000 /m <sup>2</sup>
	ISO 1763
<b>DIMENSIONAL STABILITY</b>	≤ 0.2%
	ISO 2551
<b>NUMBER OF COLOURS</b>	ASSEMBLY: 6 SENSITIVITY: 4 UNITY: 6
<b>PACKAGING</b>	Box: 16 tiles / 4 m <sup>2</sup> Pallet: 160 m <sup>2</sup>

### PERFORMANCE

<b>CLASSIFICATION</b>	33
	EN 1307
<b>LUXURY RATING</b>	LC1
	EN 1307
<b>CASTOR CHAIR RATING</b>	A: Intensive use
	EN 985
<b>FIRE CLASSIFICATION</b>	B <sub>fl</sub> -s1
	EN 13501-1
<b>IMPACT SOUND INSULATION</b>	ΔL <sub>w</sub> : 31 dB
	EN ISO 10140-3
<b>SOUND ABSORPTION</b>	Frequency Hz 125 250 500 1000 2000 4000
	EN ISO 354 α <sub>s</sub> 0.00 0.05 0.35 0.25 0.30 0.40
<b>NOISE REDUCTION</b>	α <sub>w</sub> : 0.30
	EN ISO 354
<b>PERMANENT ANTISTATIC</b>	≤ 2 kV
	ISO 6356
<b>THERMAL RESISTANCE</b>	0.155 m <sup>2</sup> K/W
	ISO 8302
<b>COLOUR FASTNESS TO LIGHT</b>	≥ 5-6
	EN ISO 105-B02
<b>COLOUR FASTNESS TO WATER</b>	≥ 4
	EN ISO 105-E01
<b>RUBBING FASTNESS</b>	≥ 4
	EN ISO 105-X12
<b>GUT N° PRODIS</b>	6CF1F75D



THE TRINITY collection is also available with Bitumen Backing. For the 'BITBACK' technical data sheet, please visit our website: <https://bloq.nl/downloads>



17/01/2025

All rights reserved to alter technical specifications.